

LED Indicators:


- LED 1: Green, Ready/ Power
- LED 2: Yellow, Triggered
- LED 3: Red, Fault Condition

7- Pole Pin:

- 1- TTL Trigger Input (3-10V)
- 2- Ground/ GND/ Return
- 3- +5.00 VDC ($\pm 2\%$, 500mA)
- 4- Fault Signal Out, L=Fault
- 5- TTL Inhibit Input

HFS/ HFB option only:

- 6- +15 VDC IN/ Buffer Cap. 470 μ F/ 25V
- 7- +180 VDC IN/ Buffer Cap. 100 μ F/ 450V

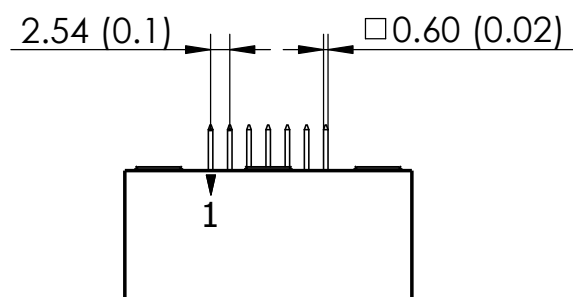

Drawing (projection) according to DIN standards.
 All dimensions in mm and (inches).
 All data and dimensions subject to change without notice.

Modification	Date	Name	Drawn	GAL	HTS 91-05-C Option: PIN-C
			Verified		
			Date	19.04.2016	
BEHLKE BEHLKE POWER ELECTRONICS GMBH Am Auernberg 4, 61476 Kronberg - Germany HIGH-TECH IN HIGH VOLTAGE Phone +49 (0) 6173-9290-20, www.behlke.com					Drawing:
					Sheet: 1 / 1

